SEE LOCATION PLAN FOR PROXIMITY TO MAIN WORKS .

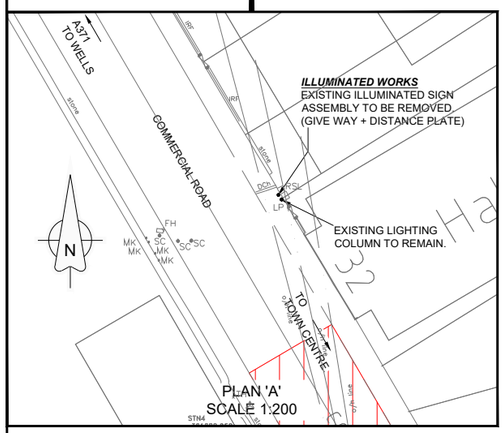

PLAN 'A'
SCALE 1:200

ILLUMINATED WORKS:
REPLACE EXISTING LIGHTING COLUMN WITH NEW 8m LIGHTING COLUMN WITH ONE URBIS AXIA LANTERN.
EXISTING ROUNDABOUT SIGN TO BE REMOVED.

ILLUMINATED WORKS:
NEW 8m LIGHTING COLUMN WITH ONE URBIS TECEO LANTERN.

BREAK OUT EXISTING CROSSING ARRANGEMENT AND CONSTRUCT NEW BUILD-OUT COMPLETE WITH BUFF TACTILE PAVING AND WHITE PLASTIC BOLLARDS WITH WHITE / RED REFLECTIVE BANDS.

ILLUMINATED WORKS:
NEW 8m LIGHTING COLUMN WITH TWO URBIS TECEO LANTERNS.

ILLUMINATED WORKS:
NEW ILLUMINATED MINI ROUNDABOUT SIGNS.

ILLUMINATED WORKS:
EXISTING GIVE WAY AND ROUNDABOUT SIGNS TO BE REMOVED.

ILLUMINATED WORKS:
REPLACE EXISTING LIGHTING COLUMN WITH NEW 8m LIGHTING COLUMN WITH ONE URBIS TECEO LANTERN.

ILLUMINATED WORKS:
EXISTING LIGHTING COLUMN TO BE REMOVED.

EXISTING GULLY TO BE CONVERTED TO A CATCHPIT.

BREAK OUT EXISTING CROSSING ARRANGEMENT AND CONSTRUCT NEW BUILD-OUT COMPLETE WITH BUFF TACTILE PAVING AND WHITE PLASTIC BOLLARDS WITH WHITE /RED REFLECTIVE BANDS.

EXISTING HATCHED ROAD MARKINGS TO BE MODIFIED. NEW MARKINGS TO DIAG. 1040.4.

EXISTING MINI ROUNDABOUT SIGN TO REMAIN.

EXISTING MINI ROUNDABOUT SIGN TO REMAIN.

ILLUMINATED WORKS:
REPLACE EXISTING LIGHTING COLUMN WITH NEW 8m LIGHTING COLUMN WITH TWO URBIS TECEO LANTERNS.

BREAK OUT EXISTING CROSSING ARRANGEMENT AND CONSTRUCT NEW BUILD-OUT COMPLETE WITH BUFF TACTILE PAVING AND WHITE PLASTIC BOLLARDS WITH WHITE / RED REFLECTIVE BANDS.

EXISTING GIVE WAY TRIANGLE TO BE REFRESHED

ILLUMINATED WORKS:
NEW ILLUMINATED SPEED AND WEIGHT RESTRICTION SIGNS.

ILLUMINATED WORKS:
EXISTING LIGHTING COLUMN TO BE REMOVED.

TRIM OVERHANGING VEGETATION.

ILLUMINATED WORKS:
NEW 8m LIGHTING COLUMN WITH ONE URBIS TECEO LANTERN.

ILLUMINATED WORKS:
EXISTING ILLUMINATED GIVE WAY AND ROUNDABOUT SIGNS TO BE REMOVED.

ILLUMINATED WORKS:
EXISTING LIGHTING COLUMN TO BE REMOVED.

NEW
8m LIGHTING COLUMN WITH ONE URBIS TECEO LANTERN.

TRIM OVERHANGING VEGETATION TO PROVIDE ADEQUATE VISIBILITY TO ADVANCE DIRECTION SIGN.

CLEAN EXISTING ADVANCE DIRECTION SIGN.

ILLUMINATED WORKS:
NEW ILLUMINATED SPEED AND WEIGHT RESTRICTION SIGNS.

ILLUMINATED WORKS:
NEW ILLUMINATED SPEED AND WEIGHT RESTRICTION SIGNS.

ILLUMINATED WORKS:
NEW 8m LIGHTING COLUMN WITH ONE URBIS TECEO LANTERN.

EXISTING LIGHTING COLUMN TO BE RETAINED.

SEE LOCATION PLAN FOR PROXIMITY TO MAIN WORKS .

B3136 TO DOWNSIDE

A371 TO WELLS

A361 TO TOWN CENTRE

COMMERCIAL ROAD

A371 OLD MARKET ROAD

RECTORY ROAD

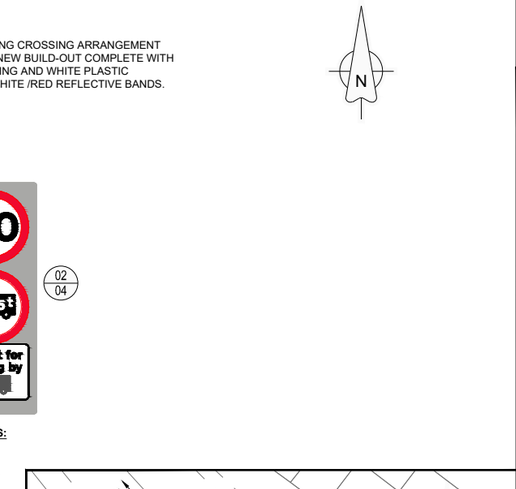

PLAN 'B'
SCALE 1:200

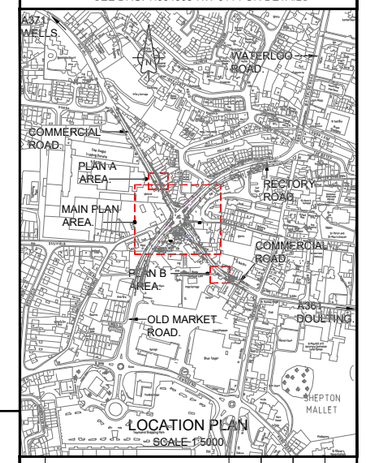

LOCATION PLAN
SCALE 1:5000

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS STATED OTHERWISE.
2. THIS DESIGN IS BASED ON A TOPOGRAPHICAL SURVEY UNDERTAKEN IN DECEMBER 2016. ALL OTHER TOPOGRAPHICAL DETAILS ARE PROVIDED BY ORDNANCE SURVEY DIGITAL MAPPING DATA.
3. ALL SIGNS AND ROAD MARKINGS ARE IN ACCORDANCE WITH THE APPROPRIATE TRAFFIC SIGNS MANUALS.
4. ALL ILLUMINATED WORKS ARE TO BE UNDERTAKEN BY SOMERSET COUNTY COUNCIL'S HIGHWAY LIGHTING TERM CONTRACTOR.

KEY:

- TACTILE PAVING - BUFF
- T — PROPOSED GULLY (TOP ENTRY)
- S — PROPOSED GULLY (SIDE ENTRY)
- E — EXISTING GULLY (RETAINED)
- LIGHTING COLUMN TO BE REMOVED
- 01/02 — SIGN REFERENCE - SIGN REF No. - SIGN LOCATION No.
- 8A — PROPOSED STREET LIGHT WITH REF. No. (SEE DRG. No. TI004303-HW-013 FOR DETAILS)
- AREA OF CARRIAGEWAY TO BE PLANED AND SURFACED - 40mm DEEP (10mm SUPERFLEX OR SIMILAR APPROVED - 65PSV)
- AREA OF FOOTWAY TO BE BROKEN OUT AND RESURFACED. REFER TO TYPICAL FOOTWAY SECTIONS DRG TI4303-HW-011.
- AREA OF NEW FOOTWAY TO BE CONSTRUCTED OVER EXISTING CARRIAGEWAY. AND RESURFACED. REFER TO TYPICAL FOOTWAY SECTIONS DRG TI4303-HW-011.
- PEDESTRIAN GUARD RAIL. SEE DRG. TI004303-HW-011 FOR DETAILS

Rev	Description	By	Date	Chk'd	Auth
A	AREA OF CARRIAGEWAY SURFACING INCREASED, FOOTWAY RECONSTRUCTION ADDED. GULLY REFERENCE REMOVED FROM KEY.	AW	01/07/2019	PC	IK

Somerset County Council ©
Traffic & Transport Development Group
County Hall
Taunton
Somerset
TA1 4DY
TEL: (0300) 123 2224
www.somerset.gov.uk

Client
SOMERSET COUNTY COUNCIL

Project
A361/B3161 COMMERCIAL ROAD
SHEPTON MALLET
MINI ROUNDABOUT IMPROVEMENT

Title
GENERAL ARRANGEMENT

File Name: TI004303-HW-010_Rev-_General Arrangement

Original Scale	Page Size	Drawn (JTH)/AW	Checked PC	Authorised EST	Status
AS SHOWN	A1	Date (09/03/17)	Date 10/04/2019	Date 10/04/2019	C

Drawing Number TI004303-HW-010 — Rev A

© Crown Copyright and database right (2017). Ordnance Survey 100038382

0 10 Millimetres 100

Filepath: T:\ENGINEERING DESIGN TEAM\LTP Schemes 2016-17\TI004303 Commercial Rd, Shepton Mallet\40 CAD\41 Working Drawings